




BR700ELCD/BR850ELCD  
BR1000ELCD/BR1200ELCD



### DESKTOP UPS WITH LCD DISPLAY



### The GreenPower UPS with multifunction LCD readout, providing immediate access to power information


Perfect for home and office applications, the BRICS LCD Series is a compact UPS which adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilised AC power output. The products' multifunction LCD readout clearly displays information of power and battery conditions. This series also features a cable collector and wall-mount design, allowing you to maintain a tidy and flexible workspace.

#### SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- USB Charging Port
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- User-replaceable Batteries
- PowerPanel® Management Software
- Wall Mount Installation

#### PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button
5. Battery Backup & Surge Protected Outlets
6. Surge Protected Outlets
7. Communication Protection Ports RJ11/RJ45
8. USB Charging Port
9. Cable Collector
10. Input Circuit Breaker
11. AC Input Power Cord
12. USB Port

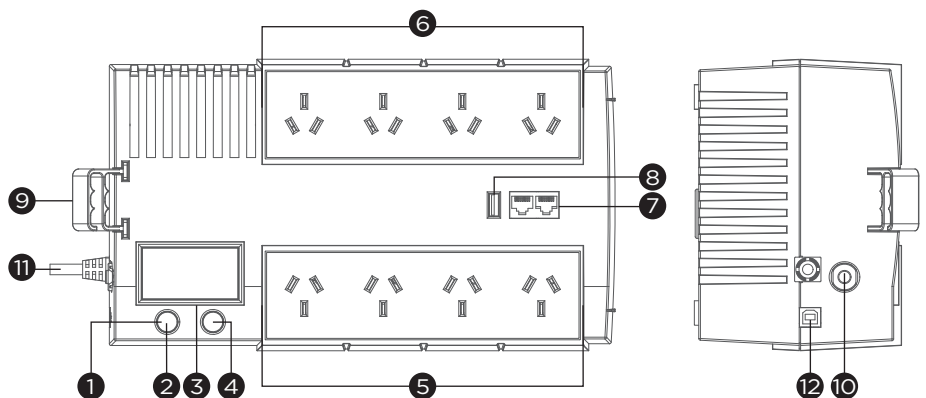

BR700/850/1000/1200ELCD



## TECHNICAL SPECIFICATIONS

Model Name	BR700ELCD	BR850ELCD	BR1000ELCD	BR1200ELCD
<b>General</b>				
UPS Topology	Line-interactive			
Energy Saving Technology	GreenPower UPS™ Bypass Technology			
<b>Input</b>				
Nominal Input Voltage (Vac)	230 ± 10%			
Input Voltage Range (Vac)	170 - 290			
Input Frequency (Hz)	50 ± 5, 60 ± 5			
Input Frequency Detection	Auto-sensing			
Rated Input Current (A)	3.18	3.86	4.55	5.45
Input Connector Type	AU			
<b>Output</b>				
Capacity (VA)	700	850	1000	1200
Capacity (Watts)	420	510	600	720
On Battery Waveform	Simulated Sine Wave			
On Battery Voltage(s) (Vac)	230 ± 10%			
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%			
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck			
Overload Protection	Circuit Breaker			
Outlet(s) - Total	8			
Outlet Type	AU x 8			
Outlet(s) - Battery & Surge Protected	4			
Outlet(s) - Surge-Only Protected	4			
USB Charging Port(s)	1			
USB Charging Current (A)	1			
Typical Transfer Time (ms)	4			
<b>Battery</b>				
Runtime at Half Load (min)	9	8	6	9
Runtime at Full Load (min)	1.5	1	1	2
Typical Recharge Time (Hours)	8			
User-replaceable	Yes			
Battery Type	Sealed Lead-acid			
Replacement Battery Pack	RBP0083	RBP0117	RBP0117	RBP0063
RBP Quantity (pcs)	1		2	
<b>Surge Protection &amp; Filtering</b>				
Surge Suppression (Joules)	150			
EMI/RFI Filtration	Yes			
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out			
<b>Management &amp; Communications</b>				
LCD Panel	Yes			
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery			
HID Compliant USB Port(s)	1			
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault			
Power Management Software	PowerPanel® Personal (Recommended)			
<b>Physical</b>				
Form Factor	Desktop			
<b>Physical Size - UPS Module</b>				
Dimensions (WxHxD) (mm.)	166 x 118 x 288			
Weight (kg.)	5.3	6.5	8.2	
<b>Environmental</b>				
Operating Temperature (°C)	0 - 40			
Operating Relative Humidity (Non-condensing) (%)	0 - 90			
Online Thermal Dissipation (BTU/hr)	71	72	102	137
<b>Certifications</b>				
Certifications*	CE, RCM			
RoHS	Yes			

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.