

# BRICs LCD Series

BR700/850/1000/1200ELCD-AU

BR700LCDD0015AU-01

## Wall-mountable UPS to Make The Most Of Your Work Space

**CyberPower**  
Reliability. Quality. Value.

The BRICs LCD Series UPS offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition. For convenient mounting, these units can be installed in either a horizontal or wall-mounted placement to make the most of your space.

The included PowerPanel® Personal Edition management software showcases the feature rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. With the Energy-Saving Technology, the BRICs LCD Series UPS can save up to 75% of electricity therefore save your electricity expenses.





### Applications

- Home and Home Office
- Home Theater System
- Small Office

### Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulation (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB Connectivity Port
- User-Replaceable Batteries
- Horizontal / Wall-mounted Use
- Cable Collector Included
- PowerPanel® Personal Edition Software

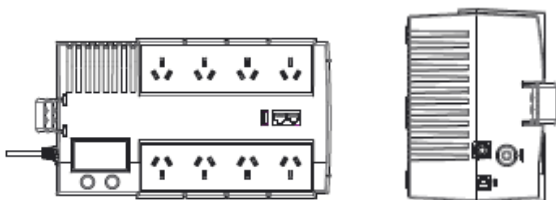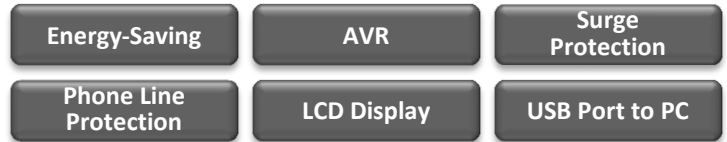

Top


Side

### ENERGY-SAVING TECHNOLOGY



**GreenPower UPS™ Technology**  
The patented advanced energy-saving technology improves the UPS operating efficiency and eliminates waste energy consumption.

### POWERPANEL® PERSONAL EDITION SW



**Auto-shutdown Software**  
Compatible with Windows 8, Windows 10, 8, 7, Vista, XP, 2000; Windows Server 2012, 2008, 2003. Software compatible with Mac and Linux is available for download online.

\*Software functions may vary due to firmware version and/or hardware constraints.

# BRICs LCD Series

BR700/850/1000/1200ELCD-AU



## Technical Specification

Model Name	BR700ELCD-AU	BR850ELCD-AU	BR1000ELCD-AU	BR1200ELCD-AU
<b>General</b>				
UPS Topology	Line-interactive	Line-interactive	Line-interactive	Line-interactive
Energy Saving	Yes	Yes	Yes	Yes
<b>Input</b>				
Voltage	220/230/240 Vac	220/230/240 Vac	220/230/240 Vac	220/230/240 Vac
Input Voltage Range	170Vac - 290Vac	170Vac - 290Vac	170Vac - 290Vac	170Vac - 290Vac
Input Frequency Range	45-65Hz	45-65Hz	45-65Hz	45-65Hz
Rated Input current	3.18A	3.86A	4.54A	5.45A
Plug Type	AU	AU	AU	AU
<b>Output</b>				
VA	700	850	1000	1200
Watts	420	510	600	720
On Battery Waveform	Simulated Sine Wave	Simulated Sine Wave	Simulated Sine Wave	Simulated Sine Wave
On Battery Voltage	220-240Vac	220-240Vac	220-240Vac	220-240Vac
Automatic Voltage Regulation (AVR)	Single Boost / Single Buck	Single Boost / Single Buck	Single Boost / Single Buck	Single Boost / Single Buck
On Battery Frequency	50/60Hz ± 1%	50/60Hz ± 1%	50/60Hz ± 1%	50/60Hz ± 1%
Outlets - Total	8	8	8	8
Outlet Type	AU	AU	AU	AU
Outlets - Battery & Surge Protected	4	4	4	4
Outlets - Surge-Only Protected	4	4	4	4
USB Charging Ports	Yes	Yes	Yes	Yes
Transfer Time	4ms	4ms	4ms	4ms
<b>Battery</b>				
Runtime at 60W (min)	47	57	60	80
Runtime at 90W (min)	28	38	42	51
Battery Type	Sealed Lead Acid	Sealed Lead Acid	Sealed Lead Acid	Sealed Lead Acid
Battery Quantity	1	1	1	1
User Replaceable	Yes	Yes	Yes	Yes
Hot-Swappable	Yes	Yes	Yes	Yes
Typical Recharge Time	8 Hours	8 Hours	8 Hours	8 Hours
Replacement Battery Pack	RBPO083	RBPO006	RBPO006	RBPO063
Replacement Battery Pack Quantity	1	1	1	2
<b>Surge Protection &amp; Filtering</b>				
Surge Suppression	125 Joules (L-N)	125 Joules (L-N)	125 Joules (L-N)	125 Joules (L-N)
Phone / Network Protection RJ11/RJ45	1-In, 1-Out (Combo)	1-In, 1-Out (Combo)	1-In, 1-Out (Combo)	1-In, 1-Out (Combo)
<b>Management &amp; Communications</b>				
LCD Control Panel	Yes	Yes	Yes	Yes
HID Compliant USB Port	Yes	Yes	Yes	Yes
LED Indicators	YES	YES	YES	YES
Audible Alarms	On Battery, Low Battery, Overload, Fault	On Battery, Low Battery, Overload, Fault	On Battery, Low Battery, Overload, Fault	On Battery, Low Battery, Overload, Fault
Software	PowerPanel® Personal Edition	PowerPanel® Personal Edition	PowerPanel® Personal Edition	PowerPanel® Personal Edition
<b>Physical</b>				
Form Factor	Brick	Brick	Brick	Brick
<b>Physical - UPS Module</b>				
Dimensions (WxHxD) (mm.)	166x118x288	166x118x288	166x118x288	166x118x288
Weight (kg.)	5.3	6.5	6.5	8.2
<b>Environmental</b>				
Operating Temperature	+ 32°F to 104° F / 0° C to 40° C	+ 32°F to 104° F / 0° C to 40° C	+ 32°F to 104° F / 0° C to 40° C	+ 32°F to 104° F / 0° C to 40° C
Operating Humidity	0% - 90% non-condensing	0% - 90% non-condensing	0% - 90% non-condensing	0% - 90% non-condensing
Operating Elevation	0-10000 feet (0-3000meters)	0-10000 feet (0-3000meters)	0-10000 feet (0-3000meters)	0-10000 feet (0-3000meters)
Storage Temperature	- 4°F to 122° F / -20° C to 50° C	- 4°F to 122° F / -20° C to 50° C	- 4°F to 122° F / -20° C to 50° C	- 4°F to 122° F / -20° C to 50° C
Storage Relative Humidity	0% - 90%	0% - 90%	0% - 90%	0% - 90%
Online Thermal Dissipation	71 BTU/hr	72 BTU/hr	102 BTU/hr	137 BTU/hr



DISTRIBUTED BY:

CyberPower's  
Manufacturing  
Facilities are  
ISO 9001, ISO  
14000, and  
QC080000  
Approved